

Signet 2250 Submersible Hydrostatic Pressure Sensor For Level and Depth Control



Blind Transmitter or Digital (S³L) Sensor

The Signet 2250 Hydrostatic Level Sensor for level and depth control has a one-piece injection molded PVDF body and ceramic diaphragm for superior compatibility in corrosive liquids. Utilizing hydrostatic pressure, the 2250 disregards false level signals from steam vapors, foam or any other debris on the liquid surface. Two pressure ranges allow for optimal resolution matched to your sensing needs. Solid state circuitry eliminates drift (no internal potentiometers).

These sensors are available with a proprietary digital (S³L) output, or 4 to 20 mA output. The extended cable and capillary tubing with the union connection and a customer supplied conduit, allow submersion in process vessels.

Features

- Level and depth measurement
- 4 to 20 mA or digital (S³L) output
- Flush ceramic diaphragm
- Easy submersible installation
- Choice of two pressure ranges
- Standard union connection and extended cable and capillary tubing (10 m)



Applications

- Inventory Management
- Storage Tank Monitoring
- Neutralization Tanks
- Plating Lines
- Waste Sumps
- Clarifiers
- Overflow Protection

Specifications

General

Output	Digital (S ³ L) or 4 to 20 mA	
Repeatability for all pressure ranges	±0.5% of full scale @ 25 °C	
Resolution	-XU	0.001 psi
	-XL	0.01 psi
Response Time	< 100 ms	

Wetted Materials

Union and Union Bushing	PVC-U
Sensor Housing	PVDF
Diaphragm	Ceramic
Diaphragm Seal	FKM

Electrical

Power Requirements		
	Digital (S ³ L)	5 to 6.5 VDC <1.5 mA (power supplied by the 8900, 9900, 9950 and 0486)
	4 to 20 mA	12 to 24 VDC ±10%, regulated
Cable Length	10 m (32.8 ft)	
Cable Type	3 cond. plus shield, 22 AWG, PVC jacketed, Blk/Red/White/Shld with capillary tube	
Digital (S ³ L) Output	Serial ASCII, TTL level 9600 bps.	
	Reverse polarity and short circuit protected.	
4 to 20 mA Output		
Accuracy	±32 µA	
Resolution	< 5 µA	
Span	4 to 20 mA factory calibrated to operating ranges shown below	
Maximum Loop Impedance	100 Ω @ 12 V	
	325 Ω @ 18 V	
	600 Ω @ 24 V	

Maximum Temperature/Pressure Rating

Operating Temperature	-15 °C to 85 °C	5 °F to 185 °F
Storage Temperature	-20 °C to 100 °C	-4 °F to 212 °F
Operating Pressure	-XU: 0 to 0.7 bar (0 to 10 psig)	
	-XL: 0 to 3.4 bar (0 to 50 psig)	
Proof Pressure	-XU: 1.4 bar (20 psig)	
	-XL: 5.2 bar (75 psig)	

Shipping Weight



0.560 kg	1.23 lb
----------	---------

Standards and Approvals

CE, FCC
RoHS compliant, China RoHS
Manufactured under ISO 9001 for Quality and ISO 14001 for Environmental Management and OHSAS 18001 for Occupational Health and Safety








See Temperature and Pressure graphs for more information.

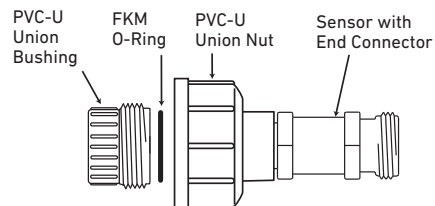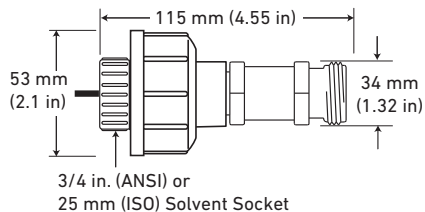Dimensions



System Overview

Submersible Installation

Panel, Wall Mount	4 to 20 mA Output	Automation System
<p>Signet Instruments - 9900-1P with Rear Enclosure</p>  <p>Signet Instruments with 3-8050-1 Universal Mount Kit or 3-8052-1 Integral Mount Kit - 8900 - 9900</p>  <p>Signet Instruments with 3-8050-1 Universal Mount Kit or 3-8052-1 Integral Mount Kit - 9950</p> 	<p>- Customer Supplied Programmable Logic Controller, or - Programmable Automation Controller</p> 	<p>- 0486 Profibus Concentrator and Customer Supplied Programmable Logic Controller or - Programmable Automation Controller</p> 
<p>Customer supplied pipe extension or conduit with pipe assembly*</p> 		
<p>Signet 2250 Submersible Hydrostatic Pressure Sensor with union connection, extended cable and capillary tubing (10 m)**</p> 		

All sold separately

*Refer to the Signet Submersion Kit brochure (3-0000.707) located on our website for installation suggestions and options.
** Cable must be exposed to the atmosphere

Ordering Notes


- 1) Instrument is sold separately. The following instrument part numbers are compatible with the 2250: 8900, 9900 and 9950 transmitters and 0486 Profibus Concentrator.
- 2) Union mount installs into pipe w/end connector and union nut.
- 3) Refer to the Signet Submersion Kit brochure (3-0000.707) located on our website for installation suggestions and options.

Pressure/Level ranges*

3-2250-XU	0 to 10 psi = 0 to 7.03 m = 0 to 23.06 ft
3-2250-XL	0 to 50 psi = 0 to 35.15 m = 0 to 115.32 ft


*Ranges calculated using specific gravity of water. Maximum ranges depending on its specific gravity.

Temperature/Pressure Graphs

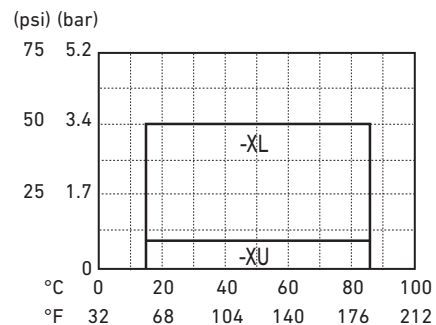

Please refer to Wiring, Installation, and Accessories sections for more information.

Ordering Information

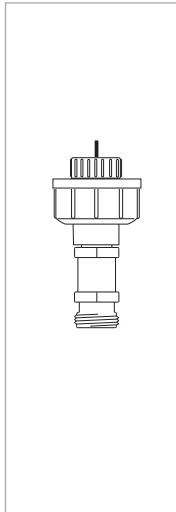

Mfr. Part No.	Code	Sensor Output	Operating Pressure	Level Range
Hydrostatic Level Sensor with ½ in. Union Connector and 10 m (32.8 ft) Cable				
PVC-U Union Connection - ¾ in. Pipe Connection				
3-2250-11L	159 001 241	NPT, digital (S ³ L)	0 - 3.4 bar (0-50 psi)	35 m (115 ft)
3-2250-11U	159 001 242	NPT, digital (S ³ L)	0 - 0.7 bar (0-10 psi)	7 m (23 ft)
3-2250-21L	159 001 247	NPT, current loop (4 to 20 mA)	0 - 3.4 bar (0-50 psi)	35 m (115 ft)
3-2250-21U	159 001 248	NPT, current loop (4 to 20 mA)	0 - 0.7 bar (0-10 psi)	7 m (25 ft)
PVC-U Union Connection - Metric Pipe Connector				
3-2250-11U-1	159 001 478	ISO, digital (S ³ L)	0 - 0.7 bar (0-10 psi)	7 m (23 ft)
3-2250-11L-1	159 001 479	ISO, digital (S ³ L)	0 - 3.4 bar (0-50 psi)	35 m (115 ft)
3-2250-21U-1	159 001 482	ISO, current (4 to 20 mA)	0 - 0.7 bar (0-10 psi)	7 m (23 ft)
3-2250-21L-1	159 001 483	ISO, current (4 to 20 mA)	0 - 3.4 bar (0-50 psi)	35 m (115 ft)

Accessories and Replacement Parts

Mfr. Part No.	Code	Description
3-8052	159 000 188	¾ in. Integral Mounting Kit
3-8052-1	159 000 755	¾ in. NPT mount junction box with one liquid tight connector and cap with junction terminals
3-8050	159 000 184	Universal Mount Kit
3-8050-1	159 000 753	Universal Mount Junction Box
3-9000.392-1	159 000 839	Liquid Tight Connector Kit, NPT (1 connector)
3-9000.392-2	159 000 841	Liquid Tight Connector Kit, PG 13.5 (1 connector)
3-0252	159 001 808	Configuration Tool

3-2250.099 Rev K (05/20)

© Georg Fischer Signet LLC

3401 Aero Jet Avenue, El Monte, CA 91731-2882 U.S.A. • Tel. (626) 571-2770 • Fax (626) 573-2057 • www.gfsignet.com • e-mail: signet.ps@georgfischer.com
 Specifications subject to change without notice. All rights reserved. All corporate names and trademarks stated herein are the property of their respective companies.