

# Pulsation Dampeners (PA040)

## Applications

- Pulsation Dampeners are used in line with a pressure gauge to suppress line pulsation and to keep the pointer steady and reducing the effect of pressure fluctuation and sudden pressure shocks.




## Ordering Information for PA040 Series

Model	Description		
PA040	Pulsation Dampeners		
Code	Material		
B	304 SS		
C	316/316L SS		
O	Others		
Code	Gauge Connection Style	Code	Gauge Connection Size
2	PT ("R" in ISO Standard)	D	3/8"
3	PF ("G" in ISO Standard)	F	1/2"
4	NPT	O	Others
X	Others		
Code	Process Connection Style	Code	Process Connection Size
2	PT ("R" in ISO Standard)	D	3/8"
3	PF ("G" in ISO Standard)	F	1/2"
4	NPT	O	Others
X	Others		

Sample Model Selection : PA040B2F2F

\* The standard specification and price are subject to change without prior notice

## Pulsation Dampeners (PA040)

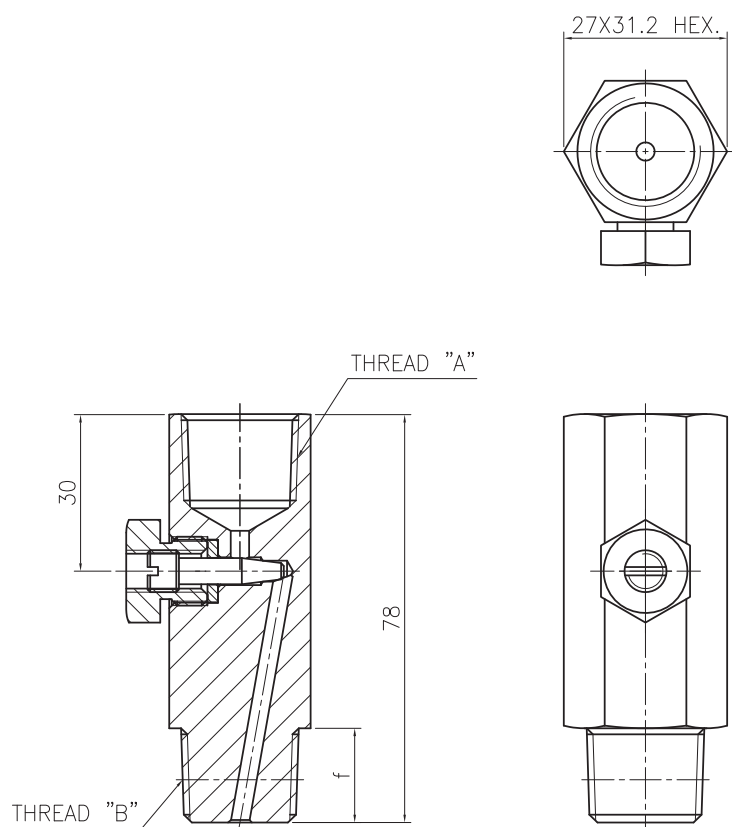

[Dimensions : mm]

THREAD "A"	THREAD "B"	f
PF 3/8"	PF 3/8"	18
PF 1/2"	PF 1/2"	20
NPT 3/8"	NPT 3/8"	16
NPT 1/2"	NPT 1/2"	18

**HISCO** HISCO, INC.

32, Seonyu-ro 43-gil, Yeongdeungpo-gu, Seoul, Korea  
T : 82-2-2677-6046 F : 82-2-2672-1873 <http://www.hiscoi.com>