




ISO 9001/14001

Gear Type Liquid Level Transmitter

Model : SGL

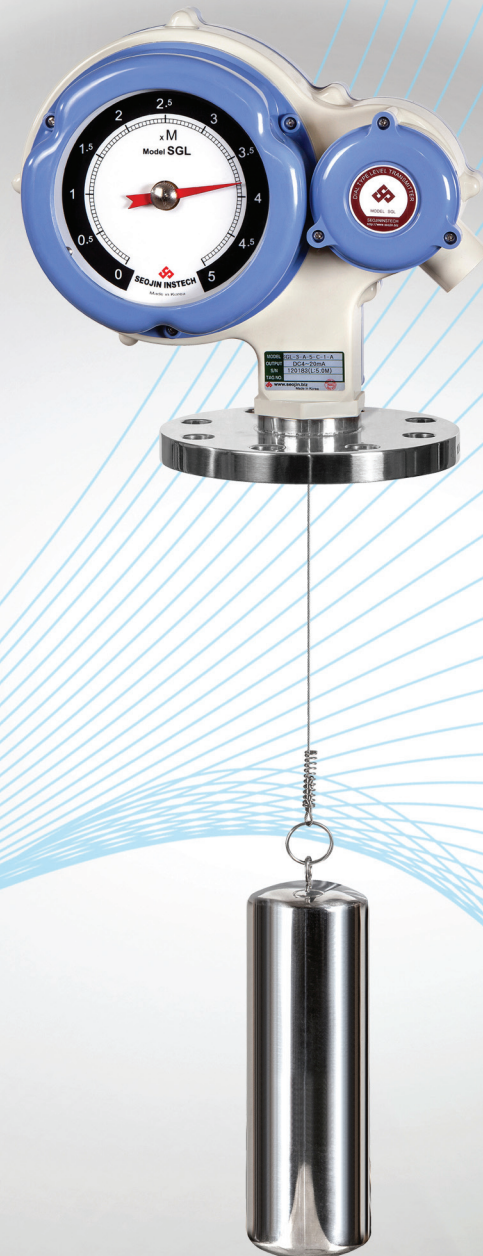

SeoJin Instech Co., Ltd.

www.seojin.biz

SGL

Gear Type Liquid Level Transmitter

Introduction

This is designed to measure the level of liquid such as water, diesel oil, bunker-C, etc. by using the buoyancy of float and spring force. When the float rises and falls, the gear mechanism connected to float through spring works to display the level on the front scale and an analog signal is also produced.

Features

- Remote and local indications are available.
- Easy to carry and install.
- Compactness of this model permits installation in a cramped space where there is a limited headroom.


Principle

When the tank is filling or emptying, the float rises and falls until the float and wire weight becomes equal to liquid buoyancy plus spring force.

That is when the level rises, the spring is wound as the buoyancy increases and the load applied to wire decreases.

When the level falls, buoyancy decreases and the load applied to wire increases.

The front scale connected to float and wire through gear mechanism displays the level variation on the dial, and R/I converter outputs 4~20mA DC analog signal by using the built in potentiometer.

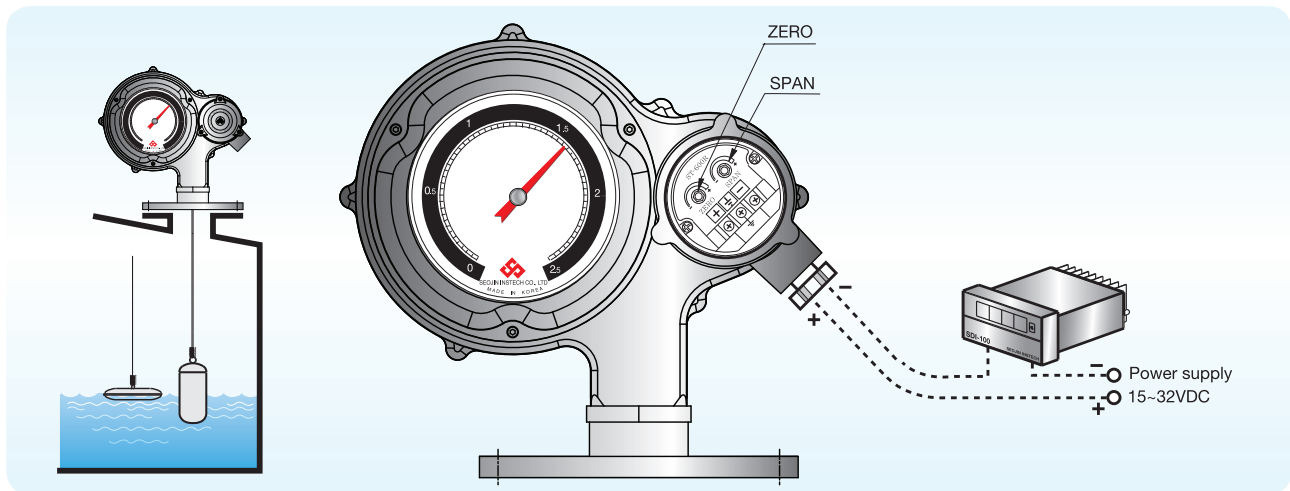


Calibration

- 1 To measure current, supply the power after connecting (1) "-" terminal of ST-600R to "+" terminal of a multi-meter, and (2) "-" terminal of multi-meter to "+" terminal of power supply.
- 2 Lower the float to 0% position, and make the multi-meter read 4mA DC by adjusting the ZERO adjustment knob.
- 3 Raise the float to 100% position, and make the multi-meter read 20mA DC by adjusting the SPAN adjustment knob.

Caution before the Installation

- Avoid high temperature and pressure tank (85°C Max.), high viscosity material and corrosive material.
- A chamber should be used if there is turbulence in tank.

Overall Dimensions

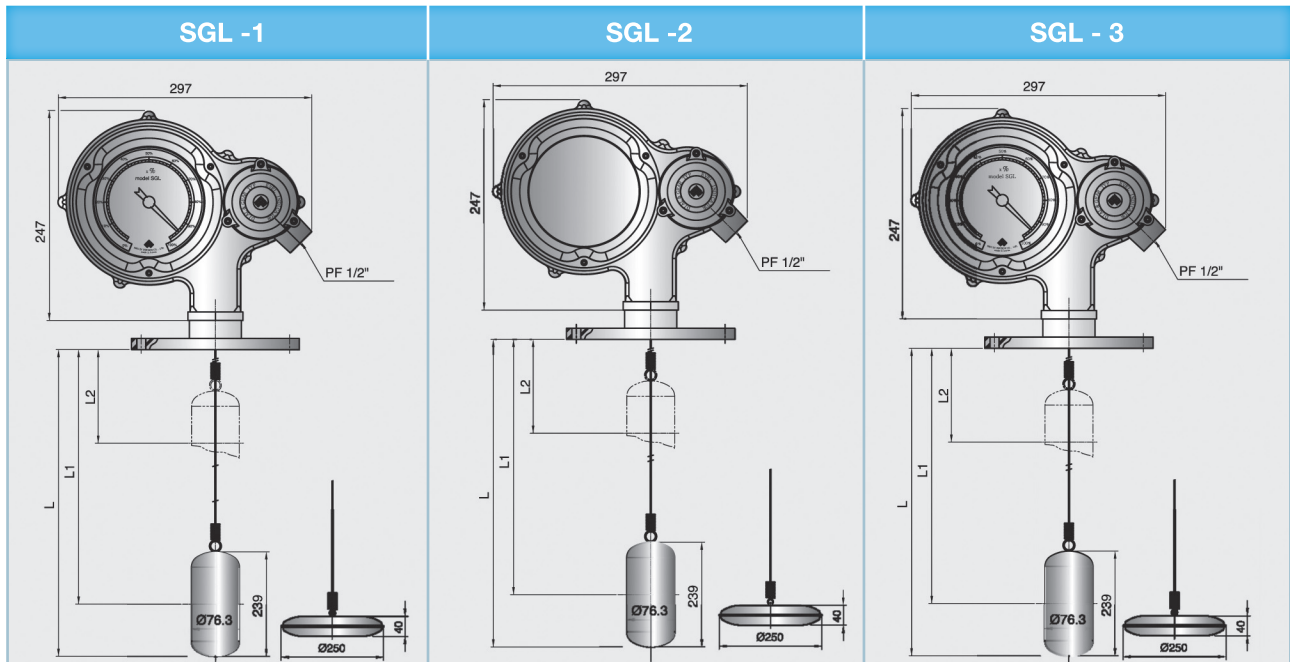

Specifications

| DESCRIPTION | Model | SGL-1 | SGL-2 | SGL-3 |
|------------------------|-------|---|-------------------------------|----------------------------|
| Measuring Material | | Liquid /Oil | | |
| Input Power | | - | 15 ~ 32V DC, 2-Wire Loop Type | |
| Output | | Dial Display | 4 ~ 20mA DC | Dial Display & 4 ~ 20mA DC |
| Loop Impedance | | - | 450 Ω (20V DC) | |
| Calibration | | - | Zero & Span | |
| Accuracy | | Vertical Float : ±20mm (Horizontal Float : ±10mm) | | |
| Measuring Range | | 10 m (Max.) | | |
| Specific Gravity | | Float : 0.6, Measuring Medium : Min. 0.8 | | |
| Temp, for Main Body | | -20 ~ +85°C | -20 ~ +60°C | |
| Temp, for Sensing Part | | -20 ~ +85°C | | |
| Operating Pressure | | Atm. | | |
| Float | | Ø76.3-239H for 3" Vertical (Std.), Ø48.6-300(H) for 2" Vertical, Ø250-40H for Horizontal (Option) | | |
| Construction | | Weather proof | | |
| Material | | Body : Unburnable ABS, Flange : 304SS or 316SS, Wire : 316SS, Float : 304SS or 316SS | | |

■ Please contact Seojin Instech if you have a specific measuring medium

Ordering Information

■ Gear Type Liquid Level Transmitter

SGL- 3 A 5 A 1 A

CONDUIT CONNECTION

A = PF 1/2" (Std.)
 B = PT 1/2"
 C = PF 3/4"
 D = PT 3/4"
 E = NPT1/2"
 F = NPT3/4"
 OP = etc.

TYPE OF FLOAT

1 = Vertical Type to insert into 3" Pipe
 2 = Vertical Type to insert into 2" Pipe
 3 = O.D 10" Horizontal Type

MOUNTING SIZE

A = JIS 10K 80A 6T FF FLANGE (Std.)
 B = JIS 10K 100A 6T FF FLANGE (Std.)
 C = JIS 10K 80A FF FLANGE
 D = JIS 10K 100A FF FLANGE
 E = PF2" (Only ABS)
 F = ANSI #150 3" RF FLANGE
 G = ANSI #150 4" RF FLANGE
 OP = etc

MEASURING PART LENGTH

| | |
|--------------------|----------------------|
| 1 = 0 ~ 1 M | 2 = 0 ~ 2 M |
| 3 = 0 ~ 3 M | 4 = 0 ~ 4 M |
| 5 = 0 ~ 5 M (Std.) | 6 = 0 ~ 6 M |
| 7 = 0 ~ 7 M | 8 = 0 ~ 8 M |
| 9 = 0 ~ 9 M | 10 = 0 ~ 10 M (Max.) |

WET PART MATERIAL(FLOAT, WIRE, FLANGE)

A = 304SS
 B = 316LSS

OUTPUT

1 = Local Indication only
 2 = 4 ~ 20mA DC Output (Non local indication)
 3 = Local Indication & 4 ~ 20mA DC Output

■ When placing an order, selected ordering number should be indicated on the purchase order sheet.

 **SeoJin Instech Co., Ltd.**

14, Dunchon-daero 457beon-gil, Jungwon-gu
 Seongnam-si, Gyeonggi-do, Korea[Zip.13218]

☎ +82-31-627-9000 🏠 +82-31-624-5345

<http://www.seojin.biz>

2019 Edition Rev.1 (printed by Daumi)

■ Specifications subject to change without notice